


Specification Datasheet (@25°C)	
Model/PN	COM-83408-GCUD-001-ETL
Frequency Range(MHz)	CH1: GSM&CDMA:800~960MHz
	CH2: DCS: 1710~1880MHz
	CH3: 3G:1920-2170MHz
Insertion Loss in Band	CH1: ≤0.3
	CH2: ≤0.6
	CH3: ≤0.6
Outband Rejection	CH1: ≥80@1710-2170MHz
	CH2: ≥80dB @800~960MHz
	≥80dB @1920~2170MHz
	CH3: ≥80dB@800~1880MHz
VSWR	≤20
Power Rating	200W(Peak)
Impedance	50Ω
Connector	N-K
Dimension(mm)	224×146×40(excluding screws & connectors)

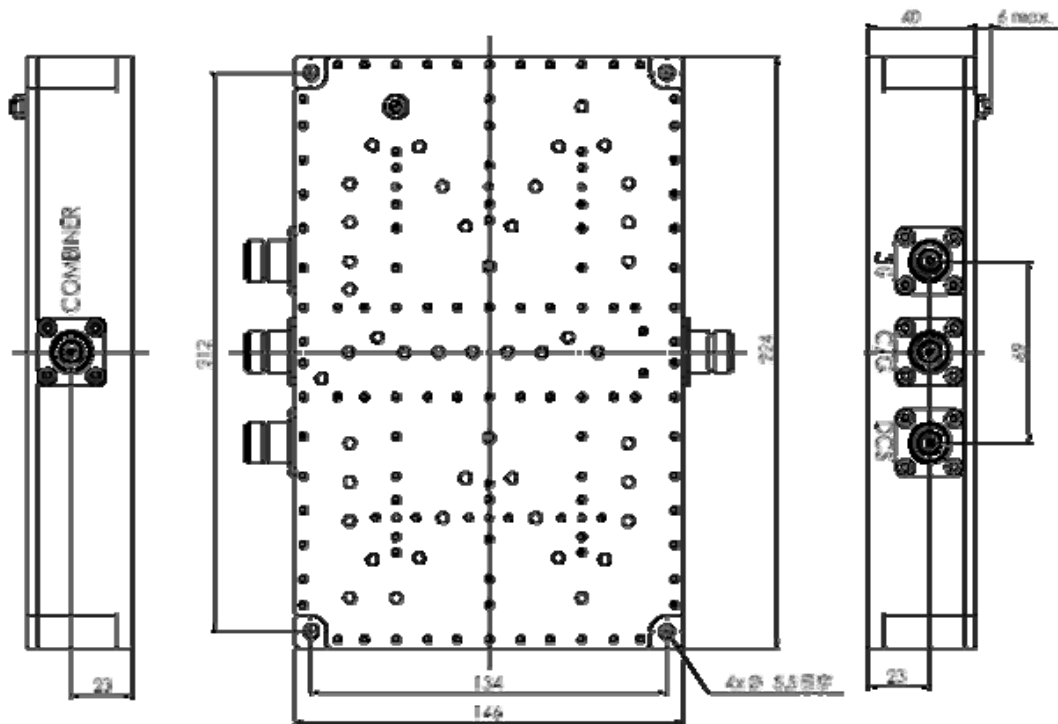

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax. 2528

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com