


Specification Datasheet (@25°C)		
Model/PN	Com-C-900-2000-01-ETL	
Parameter	Specifications	
Frequency (MHz)	CDMA-GSM900	DCS-3G
	800-960	1710-2170
Bandwidth (MHz)	160	460
Passband Insertion Loss (dB)	≤0.4	≤0.4
Passband Return Loss (dB)	≥19.5	≥19.5
Isolation(dB)	80dB@890-960	80dB@1710-2170
Passband Ripple(dB)	≤0.3	
Power	200W Max(CW)	
	5 KW Max(peak)	
Impedance	50 Ohm nominal	
IMD (dBc)	-140@2x43dBm inputs	
Temperature Range (°C)	-40to+65	
Relative humidity (%)	95 Max	
Applications	Indoor	
Weight (kg)	≤1.4	
Connector	N female	
Dimension(mm)	213*100*57(excl. screw & connector)	

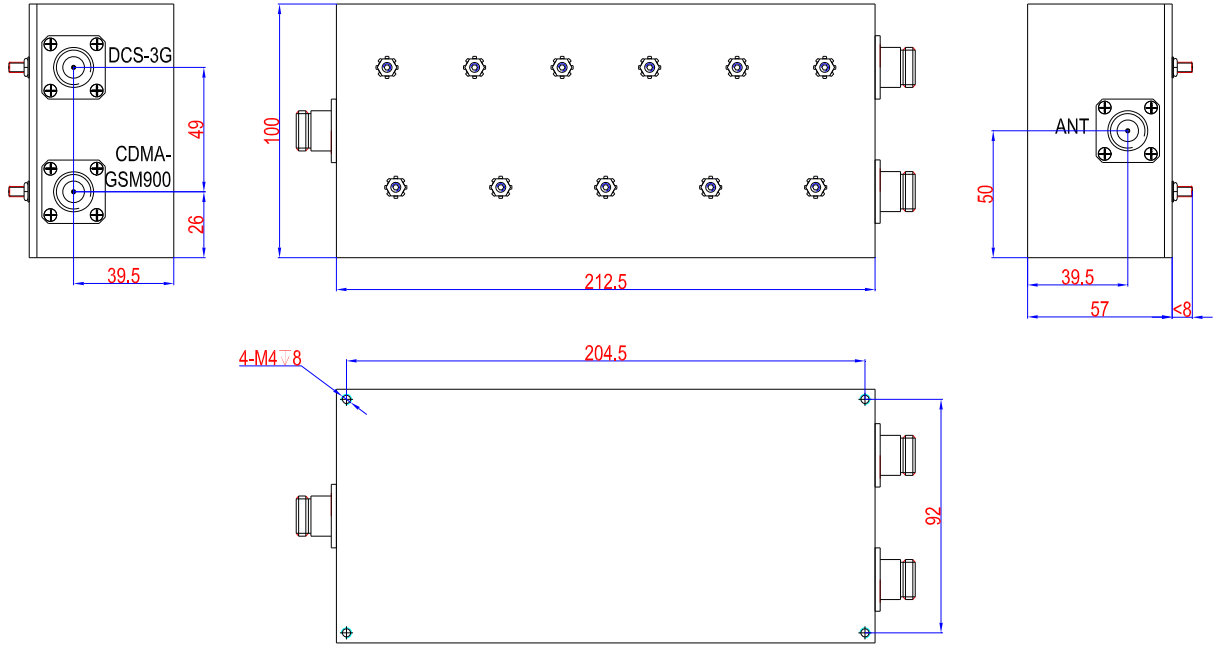

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax. 2528

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com