


Features

- Low Insertion Loss
- Continuous Variable Phase
- Guaranteed Monotonicity

Electrical Specifications

Part Number	IF(MHz)	Bandwidth(MHz)	I.L.(dB)	Phase Range(°)	VSWR	Control Voltage(V)	Package
LT-C301LA	10.7	1	0.6	0~180	1.6	0.5~12	S21/F04/B17
LT-C301LB	21.4	2	0.8		1.6	0.5~12	S21/F04/B17
LT-C301LC	30	3	1		1.6	0.5~12	S21/F04/B17
LT-C301LD	60	6	1.1		1.6	0.5~15	S21/F04/B17
LT-C301LE	70	7	1.2		1.6	0.5~15	S21/F04/B17
LT-C301LF	140	14	1.2		1.6	0.5~15	S21/F04/B17
LT-C301LG	450	45	1.3		1.6	0.5~15	S21/F04/B17

Typical Drawing

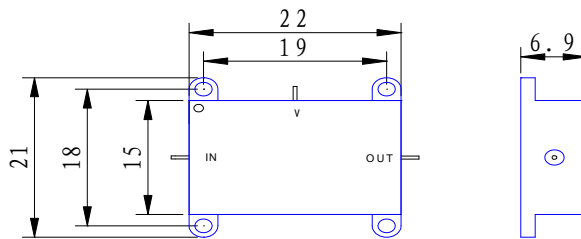

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86,755,2528 5648 Fax.2528

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com