


Coaxial Attenuators Series

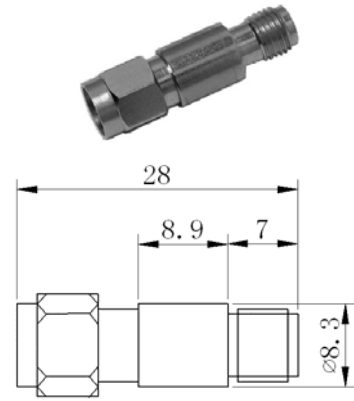


Model: ET-RS-0.5-ETL


Attenuation Value: 1-30dB
 Frequency: DC-3GHz DC-6GHz
 VSWR: 1.20: 1 1.25: 1
 Attenuation Tolerance:
 1-10dB ±0.6dB
 11-20dB ±0.8dB
 21-30dB ±1.0dB
 Impedance: 50Ω
 Power Rating: 0.5W
 Connector: SMA
 Dimension: φ8.3×28
 Weight: 7g

**Model: ET-RB-2-ETL**


Attenuation Value: 1-30dB
 Frequency: DC-3GHz DC-6GHz
 VSWR: 1.20: 1 1.25: 1
 Attenuation Tolerance:
 1-10dB ±0.6dB
 11-20dB ±0.8dB
 21-30dB ±1.0dB
 Impedance: 50Ω
 Power Rating: 2W
 Connector: BNC
 Dimension: φ15×50
 Weight: 30g

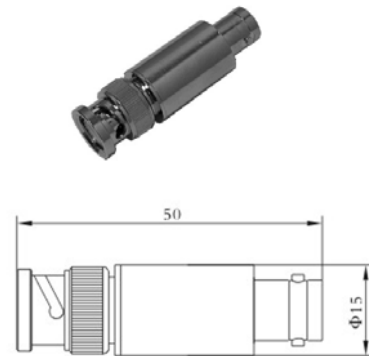**Model: ET-RN-2-ETL**

Attenuation Value: 1-30dB
 Frequency: DC-3GHz DC-6GHz
 VSWR: 1.20: 1 1.25: 1
 Attenuation Tolerance:
 1-10dB ±0.6dB
 11-20dB ±0.8dB
 21-30dB ±1.0dB
 Impedance: 50Ω
 Power Rating: 2W
 Connector: N (L16)
 Dimension: φ20×58
 Weight: 56g


**Model: ET-RS-2-ETL**

Attenuation Value: 1-30dB
 Frequency: DC-3GHz DC-6GHz
 VSWR: 1.15: 1 1.20: 1
 Attenuation Tolerance:
 1-10dB ±0.6dB
 11-20dB ±0.8dB
 21-30dB ±1.0dB
 Impedance: 50Ω
 Power Rating: 2W
 Connector: SMA
 Dimension: φ15×41
 Weight: 23g




Model: ET-RSB-2-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.15: 1 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 2W
Connector: SMA
Dimension: φ9.5×31
Weight: 9.1g

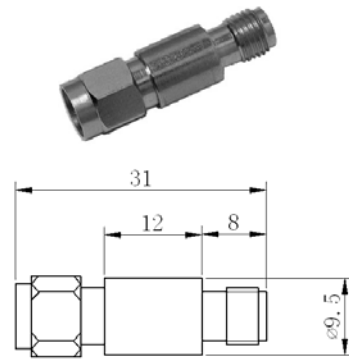


Model: ET-RN-5-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.25: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 5W
Connector: N
Dimension: φ30×58
Weight: 80g

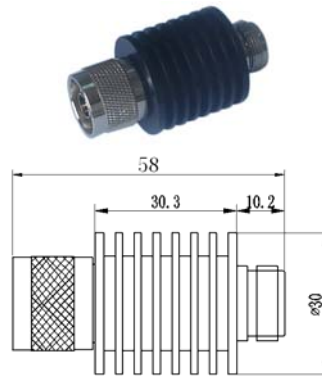


Model: ET-RS-5-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.25: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 5W
Connector: SMA
Dimension: φ25×42
Weight: 56g

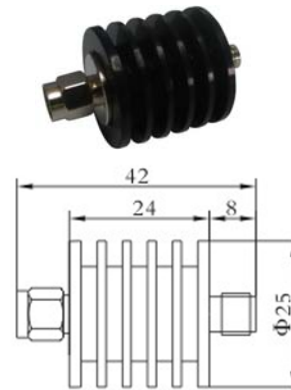


Model: ET-RNC-10-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 10W
Connector: N
Dimension: φ35×72
Weight: 135g

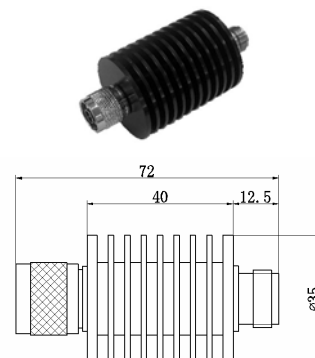


Model: ET-SN-10-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 10W
Connector: N
Dimension: 60×60×50
Weight: 307g

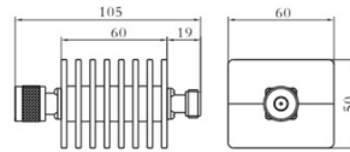


Model: ET-SS-10-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 10W
Connector: SMA
Dimension: 60×60×50
Weight: 263g

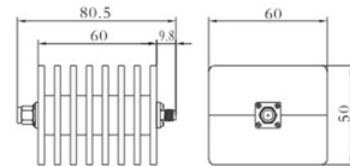


Model: ET-RNB-20-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 20W
Connector: N
Dimension: φ40×84
Weight: 165g




Model: ET-SN-20-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 20W
Connector: N
Dimension: 70×60×50
Weight: 385g




Model: ET-RNB-30-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 30W
Connector: N
Dimension: φ45×104
Weight: 230g

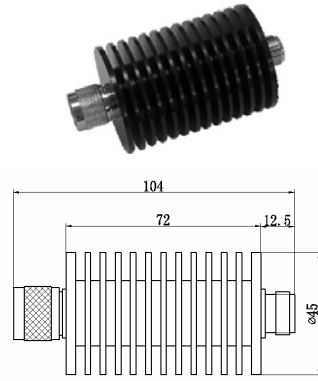


Model: ET-SN-30-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 30W
Connector: N
Dimension: 100×70×50
Weight: 630g

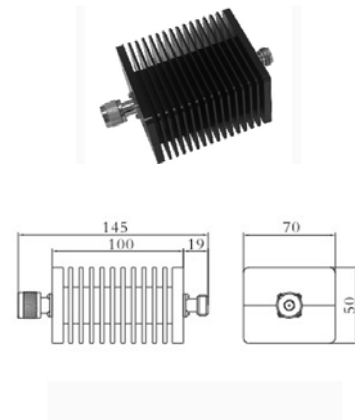


Model: ET-RNE-50-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 50W
Connector: N
Dimension: φ50×134
Weight: 330g




Model: ET-SN-50-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 50W
Connector: N
Dimension: 100×85×60
Weight: 994g

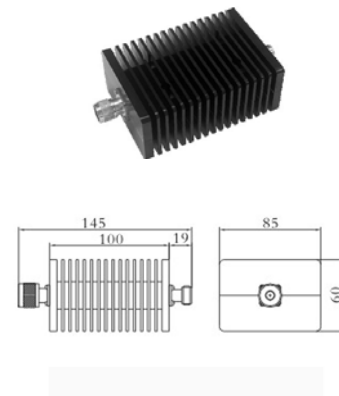


Model: ET-SJ-SN-100-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 100W
Connector: N
Dimension: 142×120×65
Weight: 1.7Kg




Model: ET-SJ-SN-200-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.30: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 200W
Connector: N
Dimension: 230×160×87
Weight: 4.2Kg




Model: ET-SJ-SN-300-ETL

Attenuation Value: 1-30dB
Frequency: DC-3GHz DC-6GHz
VSWR: 1.20: 1 1.35: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Impedance: 50Ω
Power Rating: 300W
Connector: N
Dimension: 300×160×86
Weight: 5.1Kg




Model: ET-SJ-SN-500-ETL

Attenuation Value: 10-50dB
Frequency: DC-3GHz
VSWR: 1.30: 1
Attenuation Tolerance:
10-20dB ±1.0dB
21-30dB ±1.25dB
31-50dB ±1.50dB
Impedance: 50Ω
Power Rating: 500W
Connector: N
Dimension: 400×245×97
Weight: 10 Kg




Model: ET-SJ-SN-1000-ETL

Attenuation Value: 30-60dB
Frequency: DC-3GHz
VSWR: 1.40: 1
Attenuation Tolerance:
 30-40dB ±1.5dB
 50-60dB ±2.0dB
Impedance: 50Ω
Power Rating: 1000W
Connector: N
Dimension: 400×410×97
Weight: 17kg

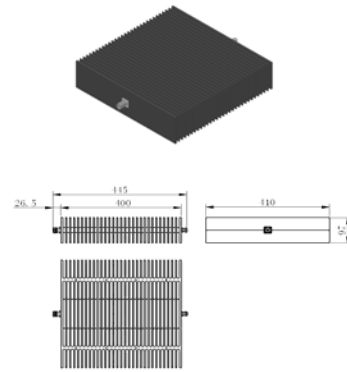


Model :ET-SJ-RSC-2-10-ETL

Attenuation Value:10dB,30dB
Frequency :DC-12.4GHz
VSWR:1.20:1
Attenuation Tolerance:±0.6dB
Impedance: 50Ω
Power Rating: 2W
Operating Temp:-55 to +85℃
Connector: SMA-KK
Dimension: φ9.5×28
Weight:8gs

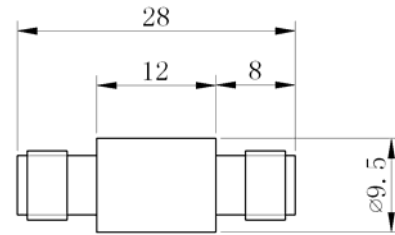


Model: ET-SJ-RNC-2-30-ETL

Attenuation Value:1-30dB
Frequency :DC-18GHz
VSWR:1.35:1
Attenuation Tolerance:±1.0dB
Impedance: 50Ω
Power Rating: 2W
Operating Temp:-55 to +85℃
Connector: NJ-NK
Dimension: φ20×58
Weight:50gs



Model:ET-SJ-RSC-2-30-ETL

Attenuation Value:1-30dB
Frequency :DC-18GHz
VSWR:1.15(DC-4GHz);
 1.25(4-12.4GHz);
 1.35(12.4-18GHz)
Attenuation Tolerance:±1.0dB;
Impedance: 50Ω
Power Rating: 2W
Operating Temp:-55 to +85℃
Connector: SMA
Dimension: φ9.5×31
Weight: 9gs

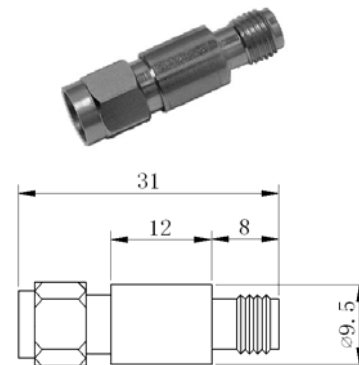

Model:ET-SJ-RSD-2-30-ETL

Attenuation Value:30dB

Frequency :DC-26.5GHz

VSWR:1.15(DC-4GHz);

1.20(4-8GHz);

1.25(8-12.4GHz);

1.35(12.4-18GHz);

1.50(18-26.5GHz);

Attenuation Tolerance:±1.0dB;

Impedance: 50Ω


Power Rating: 2W

Operating Temp:-55 to +85℃

Connector: SMA

Dimension: φ9.5×31

Weight: 9gs

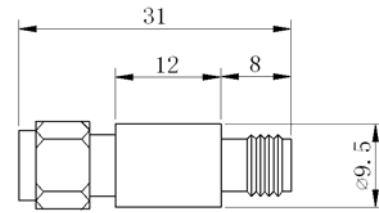

Eleading Technologies Ltd.

F5102,Yunshenchu,Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip.518081. Ph.86,755,2528 5648 Fax.2528 5629

eleading@vip.163.com sales@eleadingchian.com www.eleadingchina.com