


Characteristics

Input Impedance	50Ω	
Power rating	2 up to 250W	
Frequency Range	DC-3GHz,DC-6GHz	
Attenuation Value	1-30	
Attenuation Tolerance	1-10dB	±0.6
	11-20dB	±0.8
	21-30	±1.0
VSWR	1.20:1	
Operating Temp	-55-+150°C	
Substrate Materials	BeO AlN Al ₂ O ₃	

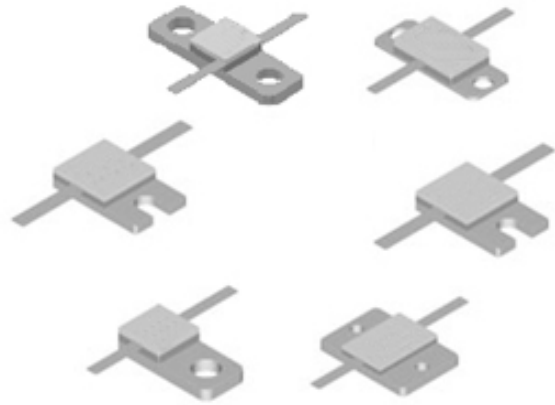

Notes:

- 1) Attenuation value, lead length and outline can be customized.
- 2) RoHS compliant.

Figure 1


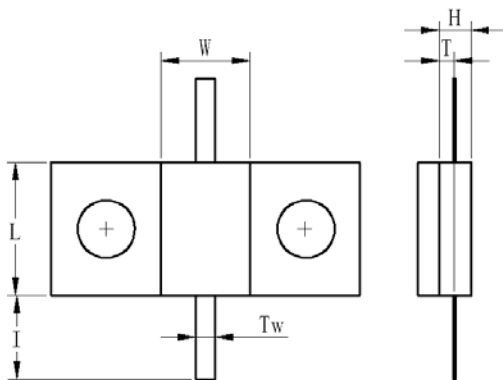



Figure 2

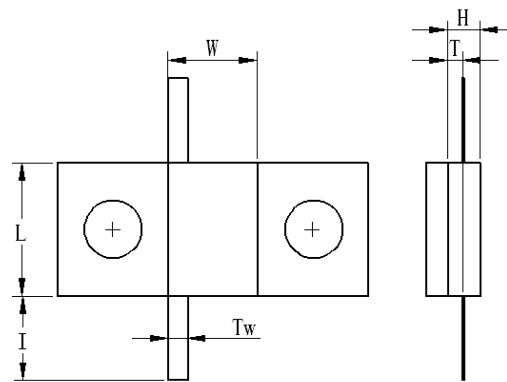

Note: Appendix A in the following part numbers is for fig.1 hereabove,B for fig.2

Model: ET-XXABR1101A

Power Rating: 30W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm

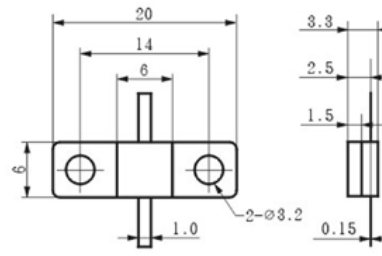


尺寸单位: mm

Note: XX stand for att. value from 1-30dB for option.

Model: ETXX-30ADJ1101


Power Rating: 30W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm



尺寸单位: mm

Model: ETXX-50ABO1201


Power Rating: 50W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm

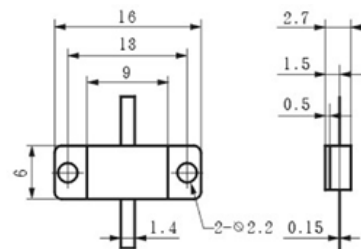

尺寸单位: mm

Model: ETXX-60AHE1504


Power Rating: 60W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm



尺寸单位: mm

Model: ETXX-100ABAD3901

Power Rating: 100W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm




尺寸單位: mm

Note: XX stand for att.value from 1-30dB for opt

Model: ETXX-100ABR1202


Power Rating: 100W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm

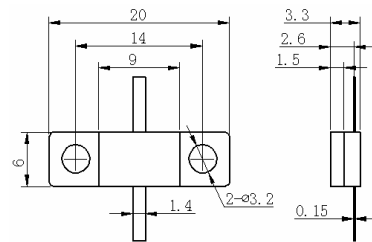

尺寸單位: mm

Model: ETXX-250ABCK2701

Power Rating: 250W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8dB
21-30dB ±1.0dB
Standard Lead Length: 6mm




尺寸單位: mm

Note:XX stand for att.value from 1-30dB for option.

Model: ETXX-2ABR1101A

Power Rating: 2W
Attenuation Value: 1-30dB
Frequency: DC-3GHz
VSWR: 1.20: 1
Attenuation Tolerance:
1-10dB ±0.6dB
11-20dB ±0.8Db
21-30dB ±1.0dB
Standard Lead Length: 6mm

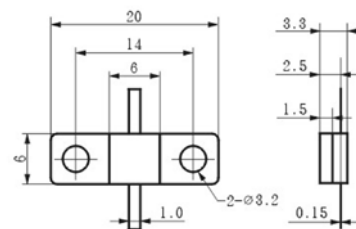

尺寸單位: mm

Model: ETXX-10ABR1101A

Power Rating: 10W

Attenuation Value: 1-30dB

Frequency: DC-3GHz

VSWR: 1.20: 1


Attenuation Tolerance:

1-10dB ± 0.6 dB

11-20dB ± 0.8 Db

21-30dB ± 1.0 dB

Standard Lead Length: 6mm

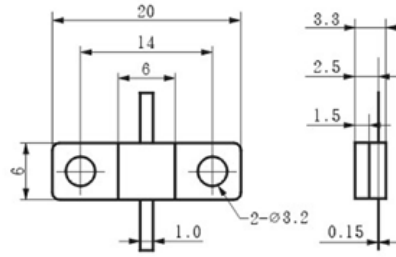

尺寸單位: mm

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, shenzhen, China. Zip. 518081. Phn. ++86, 755, 2528 5648 Fax. 2528 5629

eleading@vip.163.com sales@eleadingchina.com www.eleaidngchina.com