


Characteristics

Nominal Resistance	4-400Ω optional
Power Rating	2-800W
Resistance Tolerance	±5%, ±2%
Frequency Range	DC-4
Substrate Material	BeO、 AlN 、 Al ₂ O ₃
Temp Coefficiene	< 150ppm/°C
Operating Temp	-55~+150°C


Notes:

- 1) Resistance, lead length and outline can be customized.
- 2) RoHS compliant.

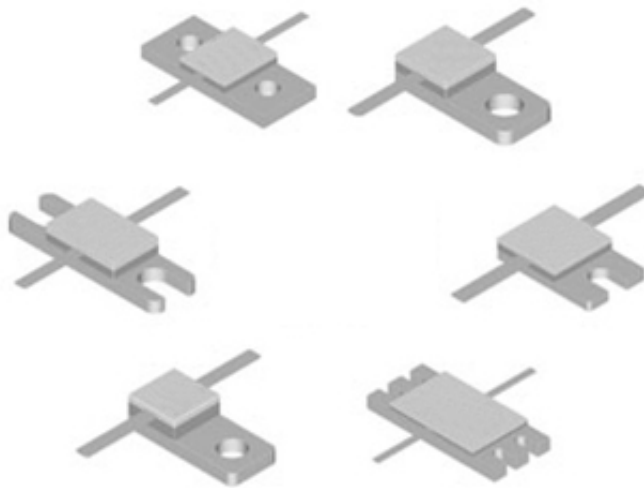

Model: ET100-5RDN0304


Rating Power: 5W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
Standard Lead length: 4mm



尺寸单位: mm

Model: ET100-10RDA0702


Rating Power: 10W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 4mm



尺寸单位: mm

Model: ET100-10RBE0702


Rating Power: 10W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 4mm



尺寸单位: mm

Model: ET100-30RDJ1101


Rating Power: 30W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 6mm



尺寸单位: mm

Model: ET100-30RBR1101


Rating Power: 30W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 6mm

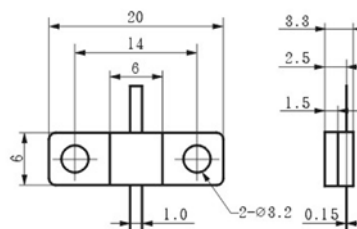

尺寸单位: mm

Model: ET100-30RDQ3701


Rating Power: 30W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Operating Frequency: DC-3GHz
Standard Lead length: 6mm

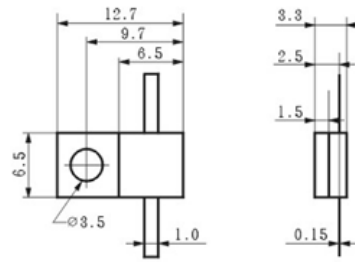

尺寸單位: mm

Model: ET100-40RDQ3702


Rating Power: 40W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-40RDJ1103


Rating Power): 40W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-60RBR1102


Rating Power: 60W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-60RDK3302


Rating Power: 60W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-4GHz
Standard Lead length: 6mm



尺寸單位: mm


Model: ET50-60RBAH2505

Rating Power: 60W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-0.5GHz
Standard Lead length: 6mm

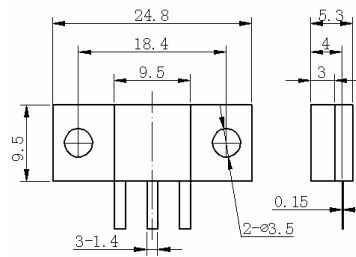

Model: ET100-80RBR1201


Rating Power: 80W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
Standard Lead length: 6mm



尺寸单位: mm

Model: ET100-100RBR1202


Rating Power: 100W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
Standard Lead length: 6mm



尺寸单位: mm

Model: ET100-100RBZ2101


Rating Power: 100W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
Standard Lead length: 6mm

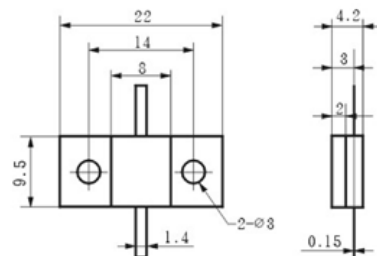

尺寸单位: mm

Model: ET100-100RHE1501


Rating Power: 100W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2.5GHz
Standard Lead length: 6mm



尺寸单位: mm

Model: ET100-150RHE1502


Rating Power: 150W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Operating Frequency: DC-2.5GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-150RBAH2503


Rating Power: 150W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Operating Frequency: DC-2.5GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-150RBY2302


Rating Power: 150W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Operating Frequency: DC-3GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-250RBAH2504


Rating Power: 250W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2.5GHz
Standard Lead length: 6mm

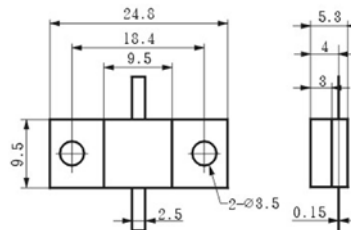

尺寸單位: mm

Model: ET100-250RHE1503


Rating Power: 250W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2GHz
Standard Lead length: 6mm



尺寸單位: mm

Model: ET100-250RBAB1702


Rating Power: 250W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2GHz
Standard Lead length: 6mm



尺寸单位: mm

Model: ET100-300REA4001


Rating Power: 300W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-1.5GHz
Standard Lead length: 8mm



尺寸单位: mm


Model: ET50-300REG3105

Rating Power: 300W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-0.5GHz
Standard Lead length: 6mm



Model: ET100-500RBCH2602


Rating Power: 500W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-800MHz
Standard Lead length: 8mm



尺寸单位: mm

Model: ET100-500REB3801


Rating Power: 500W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-800MHz
Standard Lead length: 8mm



尺寸单位: mm

Model: ET100-600REG3102


Rating Power: 600W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-500M
Standard Lead length: 8mm



尺寸单位: mm

Model: ET100-800REG3103

Rating Power: 800W
Nominal Resistance: 100Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-500M
Standard Lead length: 8mm



尺寸单位: mm

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax 2528 5629

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com