


Characteristics

Nominal Resistance	50Ω
Substrate Material	BeO,AlN,Al ₂ O ₃
Resistance Tolerance	±5%, ±2%
Power Rating	5 up to 1000W
Frequency Range	DC up to 18GHz
Operating Temperature	-55 to +150°C
Temperature Co-efficiency	<150ppm/°C


Notes:

- 1)Resistance, lead length and outline can be customized.
- 2)RoHS compliant.

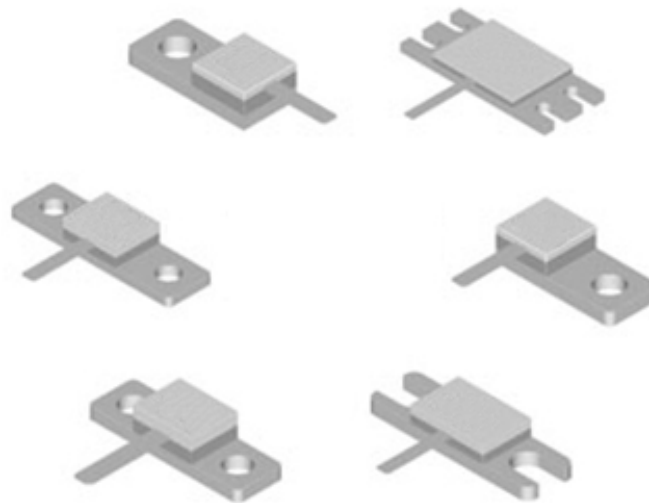

Model: ET50-5TLN0303


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-2GHz DC-3GHz
VSWR: 1.15:1 1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model: ET50-5TRN0303


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-2GHz DC-3GHz
VSWR: 1.15:1 1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model: ET50-5TLG0604


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.15:1 ,1.20:1 ,1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model: ET50-5TRG0604


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.15:1 ,1.20:,1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model: ET50-5TLA0701


Power Rating: 10W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-4GHz, DC-6GHz
VSWR: 1.15:1 ,1.20:1,1.30:1
Standard Lead length: 4mm



尺寸單位: mm

Model:ET50-5TRA0701


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-4GHz ,DC-6GHz
VSWR: 1.15:1 ,1.20:1 ,1.30:1
Standard Lead length: 4mm



尺寸單位: mm

Model:ET50-5TLA0701


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-4GHz ,DC-6GHz
VSWR: ,1.15:1 ,1.20:1 ,1.30:1
Standard Lead length: 4mm



尺寸單位: mm

Model:ET50-5TBE0701


Power Rating: 5W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz ,DC-4GHz ,DC-6GHz
VSWR: 1.15:1 ,1.20:1 ,1.30:1
Standard Lead length: 4mm



尺寸單位: mm

Model:ET50-10TLG0605


Power Rating: 10W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz DC-4GHz DC-6GHz
VSWR: 1.10:1 ,1.12:1 ,1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model:ET50-10TRG0605


Power Rating: 10W
Nominal Resistance: 50Ω
Resistance Tolerance: ± 5%; ± 2%
Frequency: DC-3GHz DC-4GHz DC-6GHz
VSWR: 1.10:1 ,1.12:1 ,1.25:1
Standard Lead length: 4mm



尺寸單位: mm

Model: ET50-10TLA0704


Power Rating: 10W
 Standard Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-3GHz, DC-4GHz, DC-6GHz
 VSWR: 1.15:1, 1.20:1, 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-10TRA0704


Power Rating: 10W
 Nominal Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-3GHz, DC-4GHz, DC-6GHz
 VSWR: 1.15:1, 1.20:1, 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-10TIA0704


Power Rating: 10W
 Nominal Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-3GHz, DC-4GHz, DC-6GHz
 VSWR: 1.15:1, 1.20:1, 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-10TBE0704


Power Rating: 10W
 Nominal Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-3GHz, DC-4GHz, DC-6GHz
 VSWR: 1.15:1, 1.20:1, 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-10TBAG0704


Power Rating: 10W
 Nominal Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-3GHz, DC-4GHz, DC-6GHz
 VSWR: 1.15:1, 1.20:1, 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-20TIN0308


Power Rating: 20W
 Nominal Resistance: 50Ω
 Resistance Tolerance: ±5%; ±2%
 Frequency: DC-6GHz
 VSWR: 1.30:1
 Standard Lead length: 4mm



尺寸单位: mm

Model: ET50-30TBN1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-30TBO1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-30TIJ1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-30TRJ1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: ,1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm

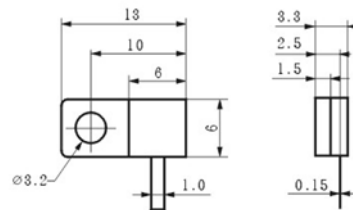

尺寸單位: mm

Model: ET50-30TLJ1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm

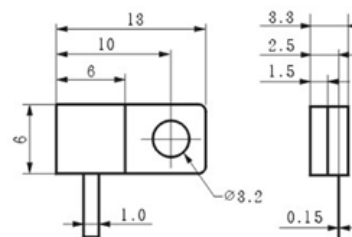

尺寸單位: mm

Model: ET50-30TBR1106


Power Rating: 30W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.25:1
Standard Lead length: 6mm

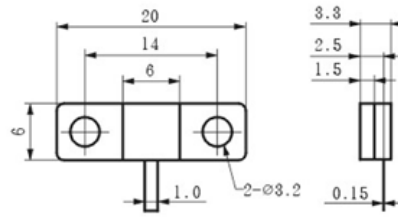

尺寸单位: mm

Model: ET50-40TBL0905


Power Rating: 40W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz DC-4GHz
VSWR: 1.12:1, 1.25:1
Standard Lead length: 6mm

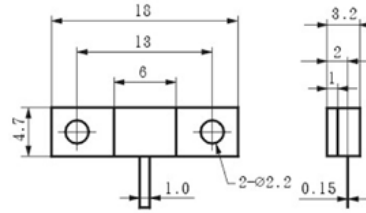

尺寸单位: mm

Model: ET50-60TLJ1102


Power Rating: 60W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.20:1
Standard Lead length: 6mm



尺寸单位: mm

Model: ET50-60TRJ1102


Power Rating: 60W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 ,1.15:1 ,1.20:1
Standard Lead length: 6mm

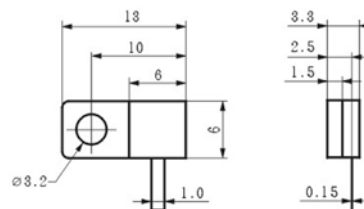

尺寸单位: mm

Mode: ET50-60TIJ1102


Power Rating: 60W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 , 1.15:1 ,1.20:1
Standard Lead length: 6mm



尺寸单位: mm

Model: ET50-60TBR1102


Power Rating: 60W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz ,DC-5GHz ,DC-6GHz
VSWR: 1.10:1 , 1.15:1 , 1.20:1
Standard Lead length: 6mm

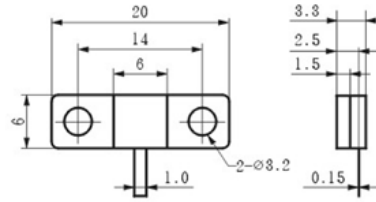

尺寸單位: mm

Model: ET50-60TRK3303


Power Rating: 60W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-6GHz
VSWR: 1.20:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-80TBR1205


Power Rating: 80W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

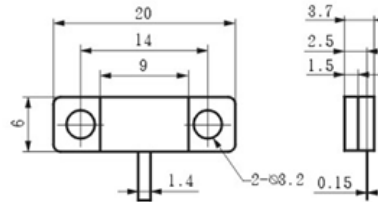

尺寸單位: mm

Model: ET50-80THA1205


Power Rating: 80W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2GHz
VSWR: 1.20:1
Standard Lead length: 6mm

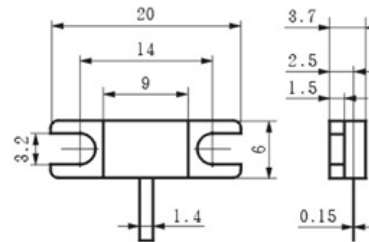

尺寸單位: mm

Mode: ET50-100TBR1203


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

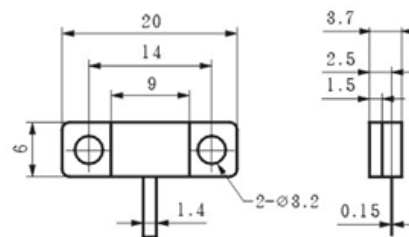

尺寸單位: mm

Mode: ET50-100TIM1501


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.15:1
Standard Lead length: 6mm

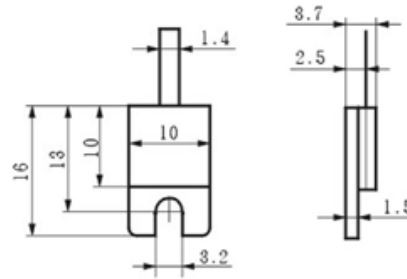

尺寸單位: mm

Model: ET50-100TLM1501


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.15:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-100TRM1501


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.15:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-100THA1203


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

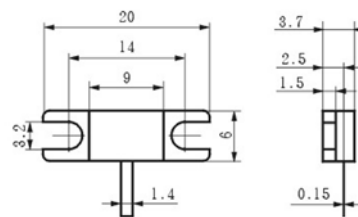

尺寸單位: mm

Model: ET50-100TBZ2102


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

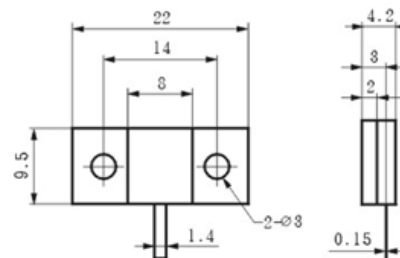

尺寸單位: mm

Model: ET50-100TBAH2504


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

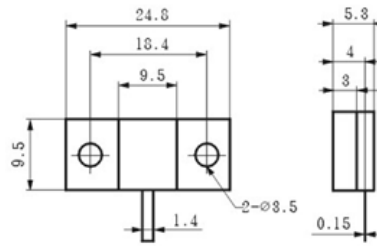

尺寸单位: mm

Model: ET50-100THE1501


Power Rating: 100W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.15:1
Standard Lead length: 6mm



尺寸单位: mm

Model: ET50-150TBY2303


Power Rating: 150W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

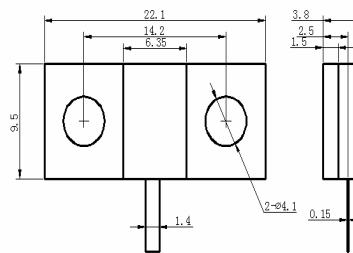

尺寸单位: mm

Model: ET50-150THE1504


Power Rating: 150W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.15:1
Standard Lead length: 6mm



尺寸单位: mm

Mode: ET50-150TBAH2505


Power Rating: 150W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

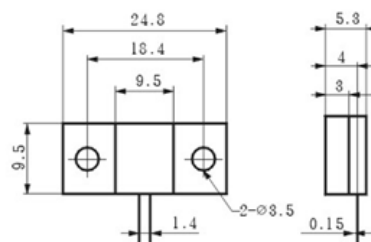

尺寸单位: mm

Model: ET50-250TBAH2506


Power Rating: 250W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-250THE1505


Power Rating: 250W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

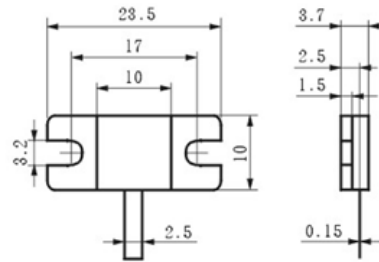

尺寸單位: mm

Model: ET50-250TBAB1701


Power Rating: 250W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-3GHz
VSWR: 1.20:1
Standard Lead length: 6mm

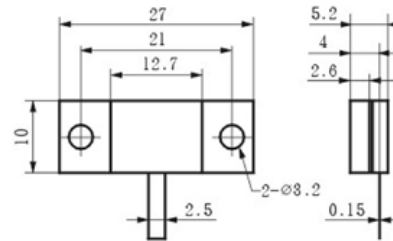

尺寸單位: mm

Model: ET50-250TEA4001


Power Rating: 250W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2GHz
VSWR: 1.20:1
Standard Lead length: 6mm



尺寸單位: mm

Model: ET50-300TBCH2701


Power Rating: 300W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-2.5GHz
VSWR: 1.20:1
Standard Lead length: 8mm

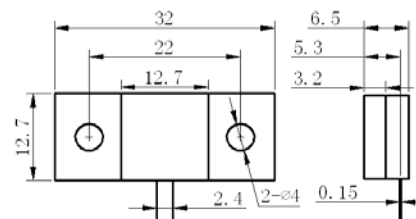

尺寸單位: mm

Model: ET50-800TMA3501


Power Rating: 800W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-1GHz
VSWR: 1.25:1
Standard Lead length: 8mm

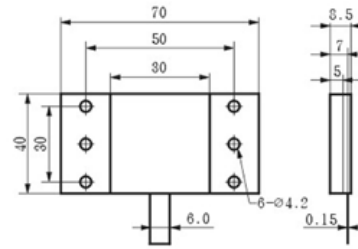

尺寸单位: mm

Model: ET50-1000TMB3601

Power Rating: 1000W
Nominal Resistance: 50Ω
Resistance Tolerance: ±5%; ±2%
Frequency: DC-1GHz
VSWR: 1.25:1
Standard Lead length: 8mm



尺寸单位: mm

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax. 2528 5629

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com