



Mismatch Termination Series

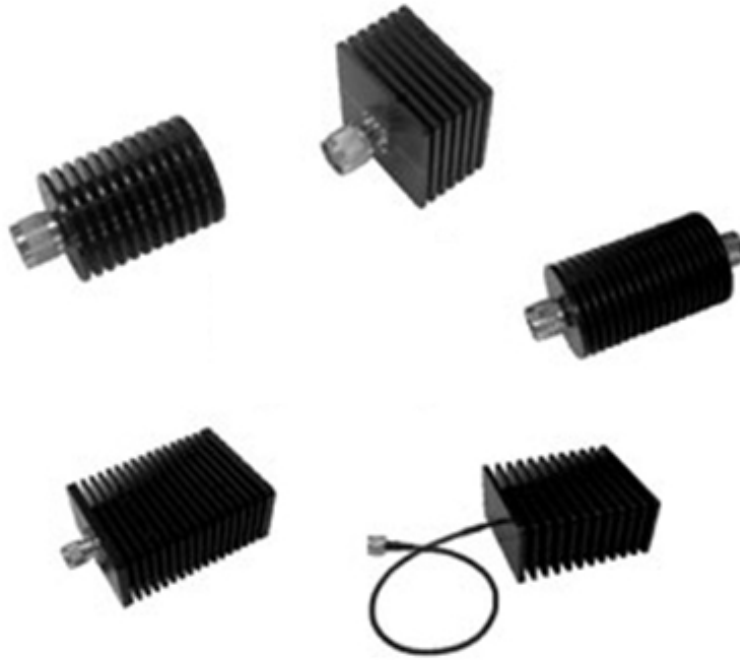


Model: ET-RN-10SDF-ETL

Frequency Range: $f_0 \pm 5\%$
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 10W
Connector: N
Dimension: $\phi 48 \times 82$
Weight: 290g




Model: ET-SN-10SDF-ETL

Frequency Range: $f_0 \pm 5\%$
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 10W
Connector: N
Dimension: $60 \times 60 \times 50$
Weight: 286g

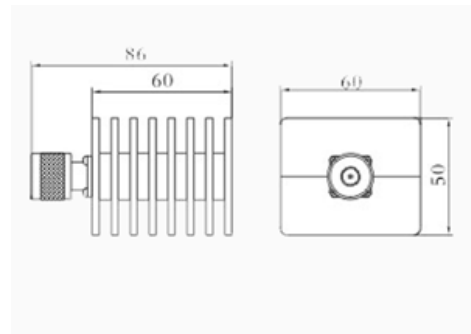


Model: ET-RN-50SDF-ETL

Frequency Range: $f_0 \pm 5\%$
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 50W
Connector: N
Dimension: $\phi 64 \times 109$
Weight: 304g




Model: ET-SN-50SDF-ETL

Frequency Range: $f_0 \pm 5\%$
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 50W
Connector: N
Dimension: $100 \times 85 \times 60$
Weight: 975g

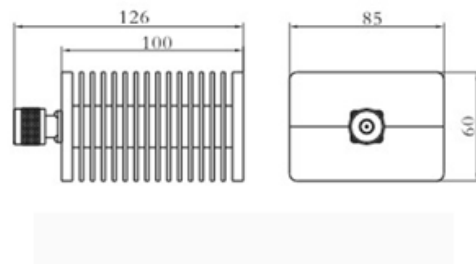


Model: ET-RDN-50SDF-ETL

Frequency Range: $f_0 \pm 5\%$
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 50W
Connector: N
Dimension: $\phi 54 \times 131$
Weight: 304g

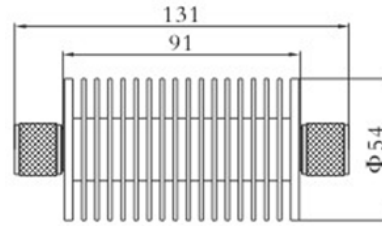

Model: ET-SD-150SDF-ETL

Frequency Range: $f_0 \pm 5\%$ (optional)
VSWR: 1.5, 2.0, 2.5,
3.0, 3.5, 4.0
VSWR accuracy: $\pm 5\%$
Power Rating: 150W
Connector: lead
Dimension: $160 \times 130 \times 65$
Weight: 2.1kg

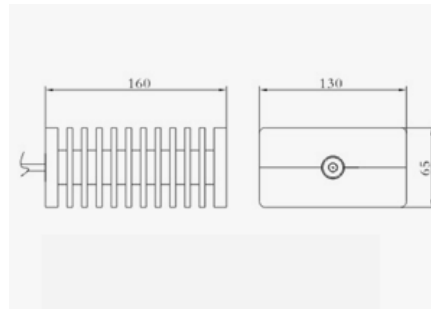

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081 Phn. ++86, 755, 2528 5648 Fax 2528 5629

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com