


## Characteristics

**Wide Bandwidth**  
**Low Insertion**  
**High Isolation**  
**No Reflection**  
**TTL Control**

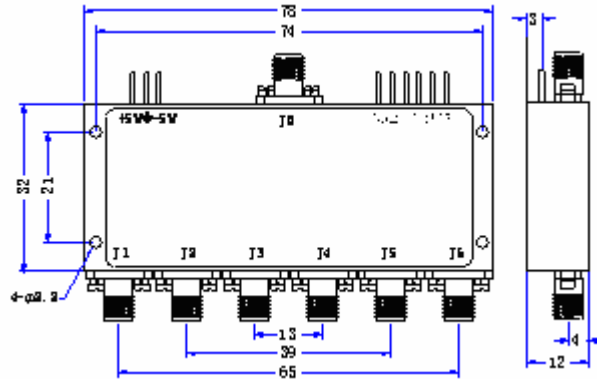

Notes: Frequency range, insertion loss, isolation, power rating and connection type, control mode and outline can be customized. And different application condition can also be customized.

## Specifications

Part Number	Frequency Range (GHz)	Insertion Loss (dB) max	Isolation (dB) min	VSWR max	Switch Speed (ns) max	Power Rating cw (w)	Outline
LT-CK62310	0.5—1.0	1.6	60	1.5	100	0.2	
LT-CK62320	1.0—2.0	1.8	60	1.5	100	0.2	
LT-CK62330	2.0—4.0	2.0	60	1.7	100	0.2	
LT-CK62340	4.0—8.0	2.4	60	1.9	100	0.2	
LT-CK62350	8.0—12.0	3.0	60	1.9	100	0.2	
LT-CK62360	12.0—18.0	3.6	60	2.0	100	0.2	
LT-CK62370	2.0—8.0	2.6	60	1.9	100	0.2	
LT-CK62380	8.0—18.0	3.6	60	2.0	100	0.2	
LT-CK62390	2.0—18.0	3.8	60	2.0	100	0.2	

## Application Notes

1. Power supply: Input from +V lead to +5V, current can be no more than 170mA ;From -V lead to -5V, current can only be up to 50mA ;
2. Control mode: When TTL input from Ei(i=1,2,3,4,5,6) and TTL is "0", voltage is now 0-0.8V, Ji(i=1,2,3,4,5,6)is on ; When TTL is high as "1", voltage is 2-5.5V and Ji(i=1,2,3,4,5,6) is off.
3. Be sure if power supply is right connected and voltage can be no more than 20% of rated;

## Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax. 2528

[eleading@vip.163.com](mailto:eleading@vip.163.com)
[sales@eleadingchina.com](mailto:sales@eleadingchina.com)
[www.eleavingchina.com](http://www.eleavingchina.com)