


Electrical Specifications

Part Number	Frequency Range (GHz)	Insertion Loss (dB)max	Limiting Level (mW)max	VSWR (I/O)max	Power Rating (W)max		Outline Drawing In mm
					CW	PK	
LT-AX27A	2-4	0.8	25	1.6	2	200 ^β	EC01
LT-AX27B	2-4	1	10	1.8	1	100 ^β	EC01
LT-AX27C	2-8	1	35	1.8	2	200 ^β	EC01
LT-AX27D	2-8	1.2	20	1.8	2	200 ^β	EC01
LT-AX27E	2-8	1.3	40	2	3	500 ^β	EC01
LT-AX27F	8-18	2.3	30	2	1	100 ^β	EC03
LT-AX27G	8-18	2.5	20	2	2	200 ^β	EC02
LT-AX27H	0.5-2	0.6	20	1.5	1	100 ^β	EC01
LT-AX27I	0.5-2	0.6	30	1.5	2	200 ^β	EC01
LT-AX27J	0.1-1	0.5	20	1.5	2	200 ^β	EC01
LT-AX45	5-6	1	20	1.5	2	200 ^β	EC01
LT-DX27A1	2.7-3.1	0.6	20	1.3	10	500 ^γ	EC01

Outline Drawing

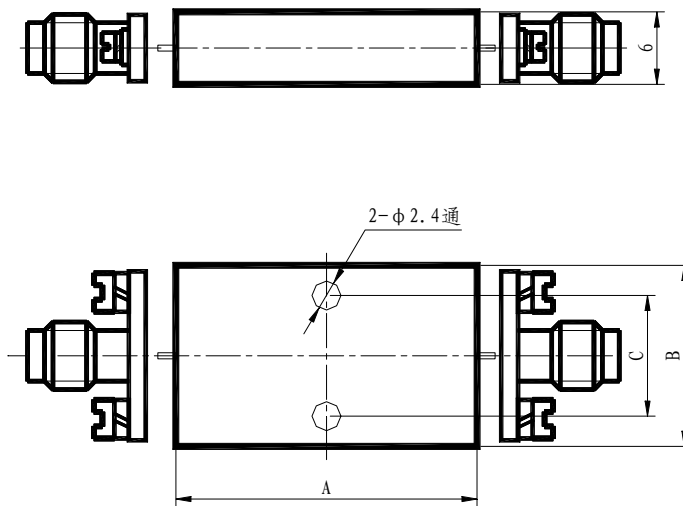

Dwgs.EC01/EC02/EC03 .

Side	EC01	EC02	EC03
A	25	20	15.6
B	15	16	14
C	10	12	10

Eleading Technologies Ltd.

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip 518081. Phn. ++86, 755, 2528 5648 Fax. 2528

eleading@vip.163.com sales@eleadingchina.com www.eleadingchina.com