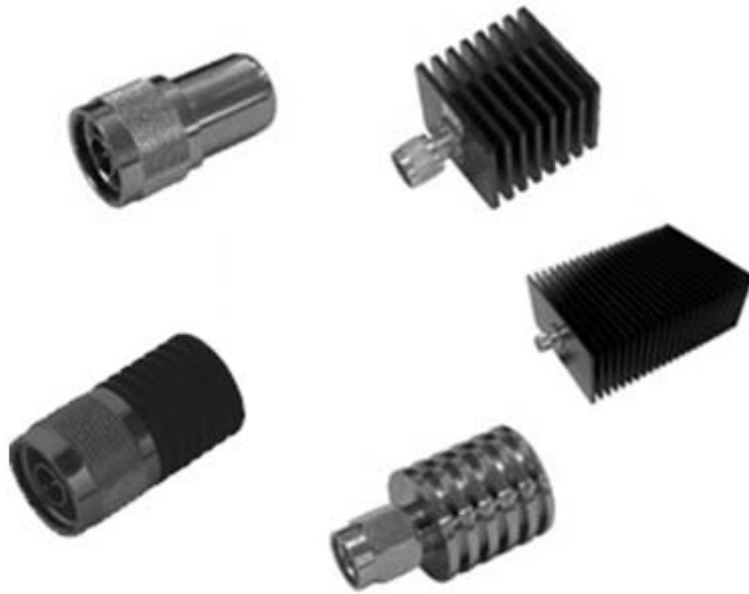
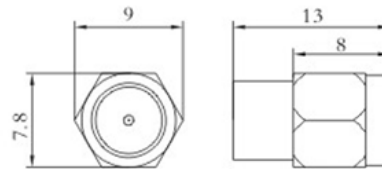


## Coaxial Termination Series




**Model: ET-RS-0.5DF-ETL**

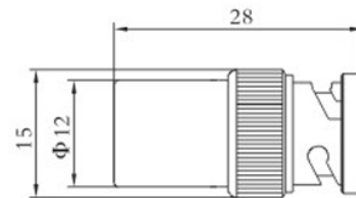
Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.20: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 0.5W  
 Connector: SMA  
 Dimension: φ9×13  
 Weight: 3.5g

**Model: ET-RT-2D-ETL**

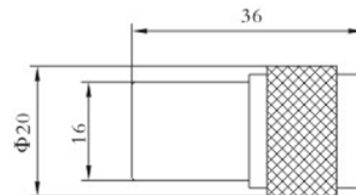
Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.20: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 2W  
 Connector: TNC  
 Dimension: φ16×28  
 Weight: 20g

**Model: ET-RB-2DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.20: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 2W  
 Connector: BNC  
 Dimension: φ15×28  
 Weight: 15g

**Model: ET-RN-2DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 2W  
 Connector: N  
 Dimension: φ20×36  
 Weight: 40g

**Model: ET-RS-2DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 2W  
 Connector: SMA  
 Dimension: φ15×25  
 Weight: 17g


**Model: ET-RS-5DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: SMA  
 Dimension: φ24×43  
 Weight: 29g




**Model: ET-RT-5DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 ,1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: TNC  
 Dimension: φ20×33  
 Weight: 36g

**Model: ET-RTB-5DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: TNC  
 Dimension: φ30×46  
 Weight: 30g

**Model: ET-RN-5DF-ETL**

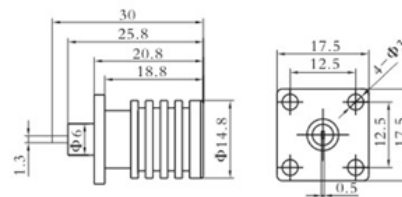
Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: N  
 Dimension: φ20×37  
 Weight: 34g

**Model: ET-RNB-5DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: N  
 Dimension: φ30×50  
 Weight: 60g

**Model: ET-RF-5DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 5W  
 Connector: Flange  
 Dimension: φ14.8×30  
 Weight: 18.5g

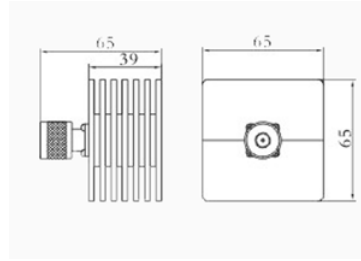
**Model: ET-RNB-10DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 10W  
 Connector: N  
 Dimension: φ35×58  
 Weight: 100 g




**Model: ET-SN-10DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 , 1.25:1  
 Impedance: 50Ω  
 Power Rating: 10W  
 Connector: N  
 Dimension: 39×65×65  
 Weight: 300g

**Model: ET-SNB-10DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 10W  
 Connector: N  
 Dimension: 60×60×50  
 Weight: 286g

**Model: ET-RNB-20DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 20W  
 Connector: N  
 Dimension: φ40×70  
 Weight: 135 g

**Model: ET-SN-20DF-ETL**


Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 20W  
 Connector: N  
 Dimension: 70×60×50  
 Weight: 330g

**Model: ET-RNB-30DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.15: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 30W  
 Connector: N  
 Dimension: φ45×90  
 Weight: 210g


**Model: ET-SN-30DF-ETL**

Frequency: DC-3GHz DC-6GHz  
 VSWR: 1.20: 1 1.25:1  
 Impedance: 50Ω  
 Power Rating: 30W  
 Connector: N  
 Dimension: 100×70×50  
 Weight: 510g




**Model: ET-RNF-50DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.20: 1 1.25:1  
Impedance: 50Ω  
Power Rating: 50W  
Connector: N  
Dimension: φ50×120  
Weight: 330 g




**Model: ET-SN-50DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.20: 1 , 1.25:1  
Impedance: 50Ω  
Power Rating: 50W  
Connector: N  
Dimension: 100×85×60  
Weight: 730g




**Model: ET-SN-100DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.20: 1 , 1.25:1  
Impedance: 50Ω  
Power Rating: 100W  
Connector: N  
Dimension: 142×120×65  
Weight: 1.5Kg




**Model: ET-SN-200DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.20: 1 1.25: 1  
Impedance: 50Ω  
Power Rating: 200W  
Connector: N  
Dimension: 230×160×87  
Weight: 3.4Kg




**Model: ET-SN-300DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.20: 1 1.25: 1  
Impedance: 50Ω  
Power Rating: 300W  
Connector: N  
Dimension: 300×160×86  
Weight: 5.1Kg




**Model: ET-SNB-300DDF-ETL**

Frequency: DC-3GHz , DC-6GHz  
VSWR: 1.20: 1 1.25: 1  
Impedance: 50Ω  
Power Rating: 300W  
Connector: N  
Dimension: 298×100×60  
Weight: 4Kg



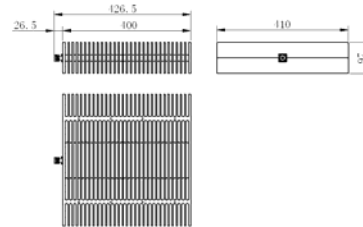
**Model: ET-SN-500DF-ETL**

Frequency: DC-3GHz DC-6GHz  
VSWR: 1.25: 1 1.30: 1  
Impedance: 50Ω  
Power Rating: 500W  
Connector: N  
Dimension: 400×245×97  
Weight: 10Kg



**Model: ET-SN-1000DF-ETL**

Frequency: DC-3GHz  
VSWR: 1.30: 1  
Impedance: 50Ω  
Power Rating: 1000W  
Connector: N  
Dimension: 400×410×97  
Weight: 17kg



**Eleading Technologies Ltd.**

F5102, Yunshenchu, Yuanlin Rd., Shatoujiao, Shenzhen, China. Zip.518081 Phn.++86 755,2528 5648 Fax.2528 5629

[eleading@vip.163.com](mailto:eleading@vip.163.com) [sales@eleadingchina.com](mailto:sales@eleadingchina.com) [www.eleadingchina.com](http://www.eleadingchina.com)